




Canadian Standard Freeness Testers

Models 33-23, 33-24

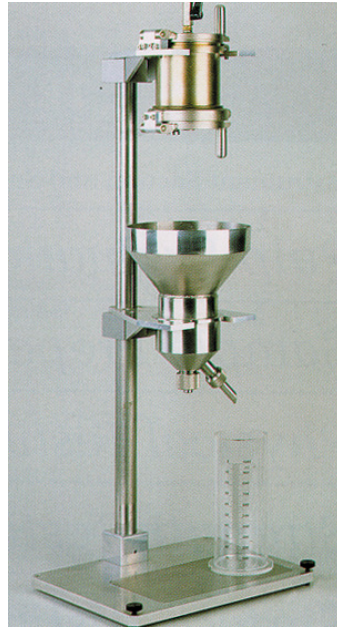

Stand model
33-23-00



Wall model
33-24-00

INTRODUCTION

Canadian Standard Freeness Tester determines the rate of drainage of a dilute pulp suspension and express it in terms of freeness. The rate of drainage is related to the work done on the fibre during beating or refining. Two models are offered: Wall mounted (brass), and stand model (stainless steel).

APPLICATIONS

Pulp, Synthetic fibres

STANDARDS

Meets TAPPI T227, ISO 5267/2, AS/NZ 1301, 206s, BS 6035 part 2, and CPPA C1

FEATURES

- Calibrated and traceable to industry standards
- Easy to operate
- Extremely accurate
- Durable, heavy construction: Stand model is constructed of corrosion resistant stainless steel and Wall model is constructed of brass

INCLUDED ACCESSORIES

- Stand model: Calibrated nozzle, screen plate, and one measuring cylinder

SPECIFICATIONS:

Stand Model, catalog number 33-23-00

Wall Model, catalog number 33-24-00

INSTRUMENT SIZE

Stand Model

Weight: 33 kg (72.6 lb)

Dimensions W x D x H: 40.6 x 30 x 112 cm (16 x 11.8 x 44 in)

Wall Model

32 kg (70.4 lb)

Dimensions W x D x H: 27 x 30.5 x 73.6 cm (10.7 x 12 x 29 in)

CONNECTIONS

Electrical: none required



TESTING MACHINES, INC.

Phone: 1-302-613-5600 Fax: 1-302-613-5619
info@testingmachines.com

Visit us online: www.testingmachines.com



©2018 Testing Machines, Inc. All rights reserved.
Specifications subject to change.